




RP series Wall / Ceiling Fans




This series of fans is ideal for high usage domestic or commercial applications.

The fans come in a variety of sizes and capacities and are rated as “continuous” run and have sealed for life, ball bearings. They can be speed controlled and connected to short lengths of ducting.

TECHNICAL DATA

Model Number RP...	Free Air m ³ /s	Fan Speed rev/sec	Avg.dBA @ 3m	Single-phase Watts	Amps	Max. °C
202	0.22	43	52	70	0.35	50
204	0.14	24	39	30	0.13	60
252	0.46	42	51	120	0.54	50
254	0.29	23	40	60	0.29	60
302	0.75	41	62	160	0.71	50
304	0.52	22	47	90	0.45	50
306	0.35	16	38	50	0.23	50
354	0.75	20	50	140	0.68	50
356	0.57	17	40	110	0.48	50

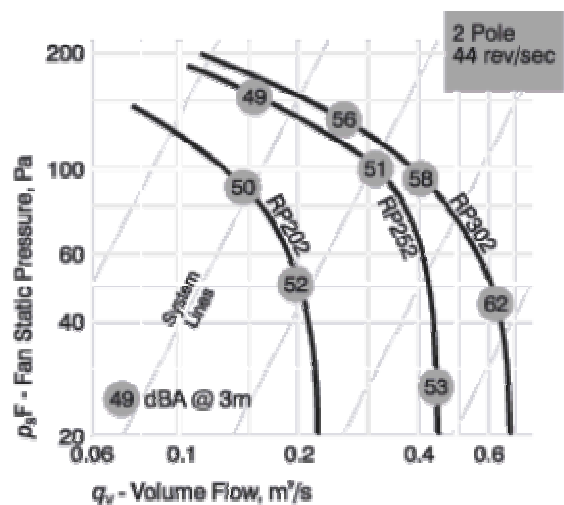



NOISE DATA

Model Number RP...	In-duct Sound Power Levels LwdB re 1pW						
	63	125	250	500	1k	2k	4k
202	78	69	68	66	69	65	60
204	60	70	54	56	54	49	40
252	62	71	67	67	67	65	60
254	63	64	57	57	57	54	47
302	63	66	74	75	80	75	71
304	60	64	64	61	64	62	55
306	53	57	55	53	54	52	44
354	62	67	70	64	65	64	59
356	54	60	61	56	56	54	49

DIMENSIONS

Model Number RP...	Dimensions, mm						Wt.kg.
	A	B	C	D	E	F	
202	282	250	5	70	208	214	2.8
204	282	250	5	70	208	214	2.8
252	320	295	7	78	259	264	3.7
254	320	295	7	78	259	264	3.7
302	395	375	7	88	310	325	4.7
304	395	375	7	88	310	325	4.7
306	395	375	7	88	310	325	4.7
354	462	442	7	110	360	375	5.1
356	462	442	7	110	360	375	5.1

