




Universal Pedestal and Wall Fans

All metal, commercial/industrial grade oscillating propeller fans, high volume air movers, **capable of continuous operation**. Ideal for warehouses, gyms, pubs, halls, factories, outdoors, etc


508mm (20") model. Pedestal and Wall			
Control Position	Speed (rpm)	Air Delivery (m ³ /min)	Noise (dB)
1	1100	115	54
2	1230	123	56
3	1400	140	65
635mm (25") model. Pedestal and Wall			
1	1150	160	54.5
2	1330	180	58.8
3	1400	220	68
750mm (30") model Pedestal and Wall			
1	1050	165	60
2	1200	220	72
3	1400	300	78

Characteristics

- Motor capacitor split phase induction with squirrel cage rotor.
- 3 speed control
- Chrome guard
- All metal construction
- Adjustable height (pedestal)
- Brass gears for long life
- Silver Colour
- Adjustable angle from 15° grade downwards to 60° grade upwards

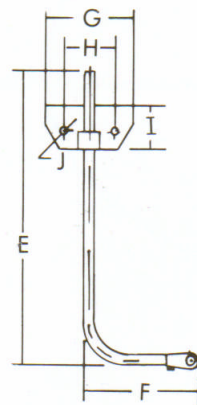

WALL MOUNT TYPE

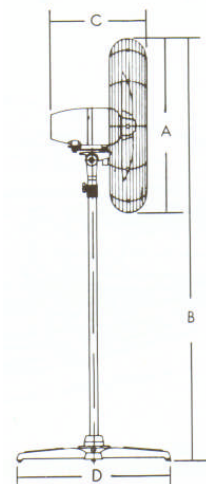

Dimensions

Size	A	B min	B max	C	D	E	F	G	H	I	J
504mm (20")	559	1244	1664	343	527	537	279	222	127	108	13
635mm (25")	679	1701	2160	387	610	737	279	222	127	108	13
750mm (30")	790	1520	1944	387	700	737	279	222	127	108	13

Dimensions of box and weight

Type	Size	L	W	H	Wht (kgs)	Net W (kgs)
Pedestal / Wall	504mm (20")	81	18.5	59	17.5 / 15	17.5 / 11.9
Pedestal / Wall	635mm (25")	95	18	72	26.5 / 18.5	23.3 / 15.3
Pedestal / Wall	750mm (30")	108	19.5	84.5	30.5	24